



DETERMINATION OF VOLATILE ORGANIC COMPOUNDS AT A MARINE TERMINAL IN UNITED STATES USING IN-BOREHOLE GAS MONITORING

A. N. Nwachukwu

Department of Physics/Geology/Geophysics, Faculty of Science, Alex Ekwueme Federal University, Ndufu-Alike Ikwo (AE-FUNAI), Ebonyi State, Nigeria., arthurdeconvenantchild@yahoo.com

C. U. Uwa

Department of Biology, Faculty of Science, Alex Ekwueme Federal University, Ndufu-Alike Ikwo (AE-FUNAI), Ebonyi State, Nigeria.

K. E. Nwagu

Alex Ekwueme Federal University, Ndufu-Alike Ikwo (AE-FUNAI), Ebonyi State, Nigeria

B. E. Ephraim

Department of Geology, Faculty of Science, University of Calabar, Calabar, Cross River State, Nigeria.

Follow this and additional works at: <https://jmstt.ntou.edu.tw/journal>



Part of the [Oceanography and Atmospheric Sciences and Meteorology Commons](#)

Recommended Citation

Nwachukwu, A. N.; Uwa, C. U.; Nwagu, K. E.; and Ephraim, B. E. (2020) "DETERMINATION OF VOLATILE ORGANIC COMPOUNDS AT A MARINE TERMINAL IN UNITED STATES USING IN-BOREHOLE GAS MONITORING," *Journal of Marine Science and Technology*. Vol. 28: Iss. 3, Article 7.

DOI: 10.6119/JMST.202006_28(3).0007

Available at: <https://jmstt.ntou.edu.tw/journal/vol28/iss3/7>

This Research Article is brought to you for free and open access by Journal of Marine Science and Technology. It has been accepted for inclusion in Journal of Marine Science and Technology by an authorized editor of Journal of Marine Science and Technology.

DETERMINATION OF VOLATILE ORGANIC COMPOUNDS AT A MARINE TERMINAL IN UNITED STATES USING IN-BOREHOLE GAS MONITORING

Acknowledgements

The work was funded by Ebonyi State Government of Nigeria under the leadership of His Excellency; Chief Martin N. Elechi with grant number EBSG/SSB/FSA/040/VOL. VIII/046. Our appreciation also goes to the Special Assistant to the Governor of Ebonyi State on Higher Education, Professor Mike Otuma, who was exceptionally supportive. Last, but certainly not the least, include Dr Steve Boulton and Dr Bart van Dongen (Supervisors) and, indeed, management and staff of Manchester University, UK, who provided the desired supervision and environment for the smooth conduct of the research.

DETERMINATION OF VOLATILE ORGANIC COMPOUNDS AT A MARINE TERMINAL IN UNITED STATES USING IN-BOREHOLE GAS MONITORING

A. N. Nwachukwu, C. U. Uwa, K.E. Nwagu, and B. E. Ephraim

Key words: Gasclam, TD/GC-MS, Tenax TA sorbent, environmental releases, carcinogens, emission limits, VOCs, United States, remediation.

ABSTRACT

A time-series study was conducted to determine both the aggregate and specific Volatile Organic Compounds (VOCs) concentrations at a Marine Terminal. An in-situ aggregate data of VOC concentrations and some environmental parameters were logged by means of an in-borehole gas monitor called Gasclam (Ion Science, UK). A *Tenax TA* sorbent tube incorporated into and to work in parallel with the Gasclam was used to adsorb bulk concentrations of VOCs and subsequently desorbed (for characterization) using Thermal Desorption/Gas Chromatography-Mass Spectroscopy (TD/GC-MS) technique. The result shows aggregate VOC concentrations of 31385 ppm and 17140 ppm in wells I and II respectively over the monitoring period. The total concentrations of adsorbed VOCs in wells I and II are 4.17×10^2 mg/m³ and 1.12×10^3 mg/m³ respectively. Among the identified VOCs (many of which exceeded their standard limits) are those considered to be hazardous to human health and environment. The study revealed that the marine terminal site is potentially hazardous, and hence, requires active remediation.

I. INTRODUCTION

VOCs comprise of a group of organic compounds which

are volatile under normal atmospheric temperature and pressure (Katy et al., 2009). They can come from a variety of natural sources (Ramirez et al., 2010), however; their presence in the environment is mainly due to spillage/leakage of solvents or fuels associated with industrial and commercial activities such as their production, storage, distribution, and uses in industrial processing (Department of Environment, 1995; Tillman and Weaver, 2005; Steinmann, 2008; Katy et al., 2009). Accordingly, VOCs have been observed to be among the most frequently detected contaminants in soil and ground water around landfills and brownfield sites (West et al., 1995; EA, 2004). They can also be found in former gas works (Thomas and Lester, 1994; Dor et al., 2001; Allen, 2002), oil refineries (Cetin et al., 2003; Pandya et al., 2006; Tiwari et al., 2010), and even in homes (from furnishings and consumer household products) (Steinmann, 2008; BS ISO 16000-9, 2006; BS ISO 16000-10, 2006; Venn et al., 2001; Hers et al., 2001; Coward et al., 2001; Coward et al., 2002).

In marine terminals, significant quantities of VOCs are often released into the atmosphere during the loading, offloading and transportation of crude oil by ships (Howard and Nikolas, 2001; Tamaddoni et al., 2014; Choi et al., 2018). Buhaug et al., (2009) explained that about 2.4 million tons of VOCs, representing approximately USD 700 million in value, are lost every year in the transportation of crude oil. These emissions constitute not only economic losses but also threat to both human health (HSE, 2000; ATSDR, 2001; IARC, 2004; Rowe et al., 2007; Argyropoulos et al., 2010) and the environment (Kesselmeier et al., 2000; Possanzini et al., 2002; IPCC, 2007).

For example, VOCs are flammable and can cause fire (HSE, 2000). At elevated concentrations in the environment, VOC can also be a concern to human health because of their potential as carcinogens (IARC, 2004; Rowe et al., 2007). In the presence of sunlight, VOCs can react with oxides of nitrogen (NO_x) to produce ground level ozone and photochemical smog¹. The main organs adversely affected by VOCs include the liver, kidneys, spleen, and stomach, as well as the nervous, circulatory, reproductive, immune, cardiovascular, and respiratory

Paper submitted 09/20/18; revised 10/23/18; accepted 04/27/20. Corresponding Author: A. N. Nwachukwu (Email: arthurdeconvenantchild@yahoo.com)

¹ Department of Physics/Geology/Geophysics, Faculty of Science, Alex Ekwueme Federal University, Ndufu-Alike Ikwo (AE-FUNAI), Ebonyi State, Nigeria.

² Department of Biology, Faculty of Science, Alex Ekwueme Federal University, Ndufu-Alike Ikwo (AE-FUNAI), Ebonyi State, Nigeria.

³ Department of Geology, Faculty of Science, University of Calabar, Calabar, Cross River State, Nigeria.

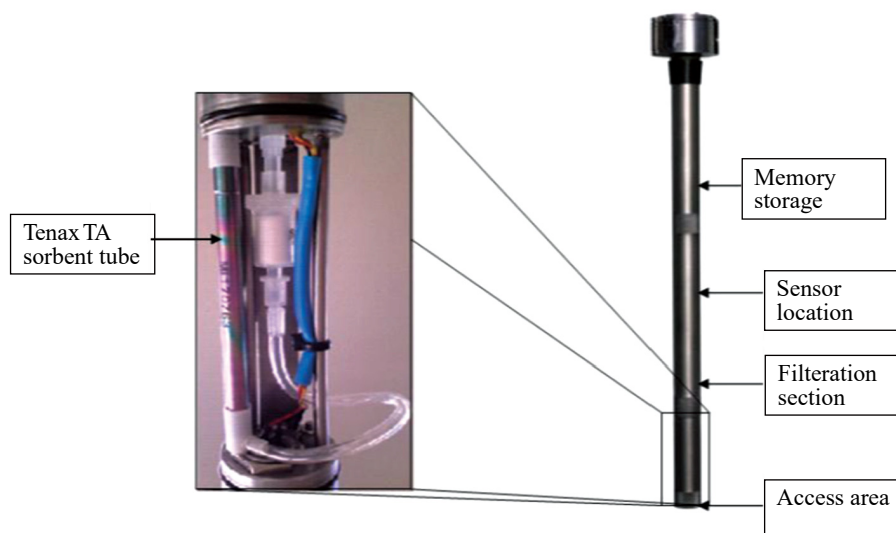


Fig. 1. Inclusion of a sorption cartridge into the basal section of a Gasclam unit

systems (Rowe et al., 2007). There is, therefore, an increasing concern about VOCs emission due to their toxicity and widespread occurrence (Ott et al., 1978; Lynge et al., 1997; Srivastava et al., 2005; Maximilian et al., 2009; Sergio et al., 2012; Nwachukwu, 2014; Nwachukwu and Henry, 2016).

Given the economic, human health and environmental effects of VOCs released from marine terminals; the International Maritime Organization (IMO) regulated VOC emissions from ships through the 15th regulation of MARPOL Annex VI 2010 (International Convention for the Prevention of Pollution from Ships, 2008, Standards for vapour emission control systems, Guidelines for the development of a VOC management plan, 2009). This regulation requires the use of a government-approved vapour emission control system for the loading of crude oil or petroleum products. A variety of studies have been conducted to determine the best techniques for VOC control systems by considering the economic and environmental effects (Khan and Ghoshal, 2000; Shonnard and Hiew, 2000; Howard and Nikolas, 2011; Huang et al., 2011; Lee et al., 2013). However, many countries have adopted Marine Vapour Recovery Systems (MVRs) to meet IMO regulations.

Whilst a lot of research has been conducted on VOCs emissions recovery, there is no single research on the quantification of VOCs from the surroundings of marine terminals. Note that the quantity of VOCs emitted and recovered directly depends on the amount of VOCs spilled/leaked. Apart from loading, unloading and transportation activities, VOCs can be spilled/leaked into the water body and the surrounding soils by many other ways, including the following²:

- *Construction activity: Ports and terminals are frequently situated on reclaimed, low-lying land, with imported fill, which sometimes contains contaminated materials.*
- *Storage facilities: Liquid bulk tanks with connecting*

pipelines could be subject to sudden and accidental structure failure, or gradual ground seepage and leakage.

- *Ancillary operations: Tank cleaning, ballast water treatment, shipbuilding, ship repairing or demolition, metal finishing and plating, fire protection activities, paint shops, foundries, and manufactured gas works all present environmental exposures.*

It is, therefore, not enough to monitor only the amount of VOCs released into the atmosphere; there is, also, a requirement to take into consideration those released into the surrounding environment as they are much closer to the receptors. It was sequel to this that this research was conducted.

Whilst there is often a requirement to monitor VOCs as in this case; current VOC monitoring techniques are often of low resolution to determine their representative concentrations (Nwachukwu and Anonye 2012). An in-borehole monitor (*Gasclam*) which collects aggregate VOCs concentration at high temporal resolution was deployed whilst a *Tenax TA* sorbent tube incorporated into and to work in parallel with this instrumentation was used to adsorb bulk concentrations of VOCs and subsequently desorbed (for characterization) using Thermal Desorption/Gas Chromatography-Mass Spectroscopy (TD/GC-MS) technique.

Gasclam was developed by Salamander Ltd – a company founded by Dr Stephen Boulton of The University of Manchester in 1996. *Gasclam* won the Innovation Technology prize in the Northwest Business Environment Awards in 2007³. *Gasclam* was designed to operate remotely; specifically in 50 mm ID monitoring wells. *Gasclam* is an improvement upon existing measurement technologies as it allows continuous collection of information about the movement and build-up of underground gases. This is unlike other ground-gas monitors which only take spot measurements. *Gasclam* monitors and records the following: CH₄, CO₂, O₂, CO, H₂S, VOCs, atmospheric

²Marsh.com

³<https://www.manchester.ac.uk/discover/news/ground-gas-gizmo-boosts-brownfield-building/>

Table 1. Volatile Organic Compounds Analytical Results, Sample: MI 14859 (Marine Terminal – Borehole 1)

S/N	Name of compounds	Individual TIC peak Area	Total mass (mg)	Total concentration (mg/m ³)	% of the total area	Cumulative % of total area
1	Undecane	2.69E+09	9.42E-02	1.96E+01	4.71E+00	4.71E+00
2	Methylcyclohexane	1.04E+09	3.62E-02	7.54E+00	1.81E+00	6.52E+00
3	4-Methyl-1-hexene	1.01E+09	3.53E-02	7.36E+00	1.77E+00	8.28E+00
4	2,6,10-Trimethyldecane	8.98E+08	3.14E-02	6.54E+00	1.57E+00	9.85E+00
5	Dadecamethylene glycol	8.33E+08	2.91E-02	6.07E+00	1.45E+00	1.13E+01
6	3-Methylhexane	7.34E+08	2.57E-02	5.35E+00	1.28E+00	1.26E+01
7	3-Methylheptane	7.33E+08	2.56E-02	5.34E+00	1.28E+00	1.39E+01
8	Ethylbenzene	6.69E+08	2.34E-02	4.87E+00	1.17E+00	1.50E+01
9	3-Methyldecane	6.65E+08	2.32E-02	4.84E+00	1.16E+00	1.62E+01
10	2-Methylhexane	6.58E+08	2.30E-02	4.79E+00	1.15E+00	1.73E+01
11	Heptane	5.96E+08	2.08E-02	4.34E+00	1.04E+00	1.84E+01
12	1,2-Dipropylcyclopentane	5.37E+08	1.88E-02	3.91E+00	9.38E-01	1.93E+01
13	1,3,5-Trimethylbenzene	5.36E+08	1.87E-02	3.90E+00	9.36E-01	2.03E+01
14	4-Methylheptene	5.33E+08	1.87E-02	3.89E+00	9.32E-01	2.12E+01
15	2-Methylheptane	5.28E+08	1.85E-02	3.85E+00	9.23E-01	2.21E+01
16	Methylcyclopentane	4.67E+08	1.63E-02	3.40E+00	8.16E-01	2.29E+01
17	1-Methyl-2-pentylcyclohexane	4.65E+08	1.63E-02	3.39E+00	8.13E-01	2.37E+01
18	Dadecane	4.61E+08	1.61E-02	3.36E+00	8.05E-01	2.45E+01
19	3-Methyloctane	4.61E+08	1.61E-02	3.36E+00	8.05E-01	2.54E+01
20	2,5-Dimethylheptane	4.53E+08	1.58E-02	3.30E+00	7.91E-01	2.61E+01
21	2-Methylundecane	4.41E+08	1.54E-02	3.21E+00	7.71E-01	2.69E+01
22	5-Methyldecane	4.37E+08	1.53E-02	3.18E+00	7.63E-01	2.77E+01
23	2-Methylpentane	4.37E+08	1.53E-02	3.18E+00	7.63E-01	2.84E+01
24	2-Cyclohexylundecane	4.15E+08	1.45E-02	3.03E+00	7.26E-01	2.92E+01
25	2,6-Dimethylnonane	4.11E+08	1.44E-02	3.00E+00	7.19E-01	2.99E+01
26	2,6-Dimethyldecane	4.10E+08	1.43E-02	2.98E+00	7.16E-01	3.06E+01
27	2-Methyldecane	4.01E+08	1.40E-02	2.92E+00	7.01E-01	3.13E+01
28	2,6-Dimethyloctane	3.73E+08	1.30E-02	2.72E+00	6.52E-01	3.20E+01
29	Hexane	3.55E+08	1.24E-02	2.58E+00	6.20E-01	3.26E+01
30	Ethylcyclohexane	3.38E+08	1.18E-02	2.47E+00	5.91E-01	3.32E+01
31	4-Methyldecane	3.34E+08	1.17E-02	2.43E+00	5.83E-01	3.37E+01
32	Octane	3.17E+08	1.11E-02	2.31E+00	5.54E-01	3.43E+01
33	3-Methylundecane	3.06E+08	1.07E-02	2.23E+00	5.35E-01	3.48E+01
34	2,3-dimethyloctane	2.96E+08	1.04E-02	2.16E+00	5.17E-01	3.54E+01
35	2,6-Dimethyldecane	2.77E+08	9.69E-03	2.02E+00	4.84E-01	3.58E+01
36	4-Methylundecane	2.75E+08	9.61E-03	2.00E+00	4.80E-01	3.63E+01
37	2-Hexyl-1-decanol	2.42E+08	8.45E-03	1.76E+00	4.22E-01	3.67E+01
38	cis-1,3-Dimethylcyclohexane	2.37E+08	8.28E-03	1.72E+00	4.14E-01	3.72E+01
39	4-Methyloctane	2.33E+08	8.14E-03	1.69E+00	4.06E-01	3.76E+01
40	1-Tridecene	2.31E+08	8.07E-03	1.68E+00	4.03E-01	3.80E+01
41	3-Methylpentane	2.05E+08	7.16E-03	1.49E+00	3.58E-01	3.83E+01
42	Chlorobenzene	2.02E+08	7.07E-03	1.47E+00	3.53E-01	3.87E+01

Table 1. (Continued)

S/N	Name of compounds	Individual TIC peak Area	Total mass (mg)	Total concentration (mg/m ³)	% of the total area	Cumulative % of total area
43	Xylene	1.64E+08	5.72E-03	1.19E+00	2.86E-01	3.90E+01
44	4-Methylnonane	1.60E+08	5.59E-03	1.16E+00	2.79E-01	3.92E+01
45	1-Methyl-2-propylcyclohexane	1.57E+08	5.48E-03	1.14E+00	2.74E-01	3.95E+01
46	Nonane	1.50E+08	5.24E-03	1.09E+00	2.62E-01	3.98E+01
47	2-Methyloctane	1.47E+08	5.13E-03	1.07E+00	2.56E-01	4.00E+01
48	3-Methylnonane	1.28E+08	4.47E-03	9.30E-01	2.23E-01	4.03E+01
49	3-Ethyl-2-methylheptane	1.25E+08	4.39E-03	9.14E-01	2.19E-01	4.05E+01
50	2,6-Dimethylundecane	9.77E+07	3.42E-03	7.12E-01	1.71E-01	4.06E+01
51	Phytol	9.12E+07	3.19E-03	6.64E-01	1.59E-01	4.08E+01
52	Pentane	8.67E+07	3.03E-03	6.31E-01	1.51E-01	4.10E+01
53	1-Ethyl-2-methylbenzene	5.55E+07	1.94E-03	4.04E-01	9.69E-02	4.11E+01
54	2-Methylbutane	4.71E+07	1.65E-03	3.43E-01	8.23E-02	4.11E+01
55	2-Butyl-1,1,3-trimethylcyclohexane	2.38E+07	8.31E-04	1.73E-01	4.15E-02	4.12E+01
56	Unidentified compounds	3.37E+10	1.18E+00	2.45E+02	5.88E+01	1.00E+02

Σ PID VOCs signal (ppm)	Σ VOC mass (mg)	Total vol. (m ³)	Σ VOCs conc.(mg/m ³)
31385	2.00E+00	4.80E-03	4.17E+02

Table 2. Volatile Organic Compounds Analytical Results, Sample: MI 148960 (Marine Terminal – Borehole 2)

S/N	Name of compounds	Individual TIC peak Area	Total mass (mg)	Total concentration (mg/m ³)	% of the total concentration	Cumulative % of total concentration
1	1,3,5-Trimethylbenzene	2.17E+09	8.82E-02	2.05E+01	1.83E+00	1.83E+00
2	Methylisopropylbenzene	1.77E+09	7.19E-02	1.67E+01	1.49E+00	3.32E+00
3	1-Ethyl-2-methylbenzene	1.56E+09	6.36E-02	1.48E+01	1.32E+00	4.63E+00
4	1,4-Dimethyl-2-ethylbenzene	1.51E+09	6.14E-02	1.43E+01	1.27E+00	5.90E+00
5	2,4-Diethyl-1-methylbenzene	1.48E+09	6.03E-02	1.40E+01	1.25E+00	7.15E+00
6	1,2,4,5-Tetramethylbenzene	1.48E+09	6.03E-02	1.40E+01	1.25E+00	8.40E+00
7	1,2,3-Trimethylbenzene	1.42E+09	5.77E-02	1.34E+01	1.20E+00	9.60E+00
8	1,2,4-Trimethylbenzene	1.41E+09	5.73E-02	1.33E+01	1.19E+00	1.08E+01
9	2,6-Dimethylundecane	1.27E+09	5.18E-02	1.21E+01	1.07E+00	1.19E+01
10	1-Methyl-2-propylbenzene	1.15E+09	4.67E-02	1.09E+01	9.67E-01	1.28E+01
11	1, 2,3,4-Tetramethylbenzene	1.12E+09	4.55E-02	1.06E+01	9.42E-01	1.38E+01
12	2,6-Dimethyldecane	1.06E+09	4.31E-02	1.00E+01	8.93E-01	1.47E+01
13	1,3-Diethyl-5-methylbenzene	1.03E+09	4.20E-02	9.76E+00	8.69E-01	1.55E+01
14	2-Ethyl-1,4-dimethyl-Benzene	8.92E+08	3.63E-02	8.44E+00	7.52E-01	1.63E+01
15	1-Phenyl-1-butene	8.54E+08	3.48E-02	8.08E+00	7.20E-01	1.70E+01
16	1-Ethyl-4-isopropylbenzene	8.52E+08	3.47E-02	8.06E+00	7.18E-01	1.77E+01
17	3-Methyl-2-butenyl(1 benzene)	8.52E+08	3.47E-02	8.06E+00	7.18E-01	1.84E+01
18	1-Ethyl-4-isopropylbenzene	8.16E+08	3.32E-02	7.73E+00	6.88E-01	1.91E+01
19	Pentamethylbenzene	7.86E+08	3.20E-02	7.43E+00	6.62E-01	1.98E+01
20	1,3-Diethylbenzene	7.81E+08	3.18E-02	7.40E+00	6.59E-01	2.04E+01

Table 2. (Continued)

S/N	Name of compounds	Individual TIC peak Area	Total mass (mg)	Total concentration (mg/m ³)	% of the total concentration	Cumulative % of total concentration
21	2,6-Dimethyloctane	7.40E+08	3.01E-02	7.00E+00	6.23E-01	2.11E+01
22	1-Sec-butyl-2,4-dimethylbenzene	6.25E+08	2.54E-02	5.91E+00	5.27E-01	2.16E+01
23	4-Methyldecane	6.20E+08	2.52E-02	5.87E+00	5.23E-01	2.21E+01
24	Cyclopropylbenzene	5.83E+08	2.37E-02	5.52E+00	4.91E-01	2.26E+01
25	p-Isopropyl benzaldehyde	5.46E+08	2.22E-02	5.17E+00	4.60E-01	2.31E+01
26	1,3-Dimethyl-2-ethylbenzene	5.37E+08	2.18E-02	5.08E+00	4.52E-01	2.35E+01
27	Undecane	5.08E+08	2.07E-02	4.80E+00	4.28E-01	2.39E+01
28	Hexylcyclohexane	4.89E+08	1.99E-02	4.62E+00	4.12E-01	2.44E+01
29	3-Ethylhexane	4.88E+08	1.99E-02	4.62E+00	4.12E-01	2.48E+01
30	2,4-Dimethyl-1-ethylbenzene	4.71E+08	1.92E-02	4.46E+00	3.97E-01	2.52E+01
31	1-Chlorooctane	4.60E+08	1.87E-02	4.36E+00	3.88E-01	2.56E+01
32	1,2-Dimethylbenzene	4.48E+08	1.82E-02	4.24E+00	3.77E-01	2.59E+01
33	1-Sec-butyl-4-methylbenzene	4.22E+08	1.72E-02	4.00E+00	3.56E-01	2.63E+01
34	tert-Pentylbenzene	4.07E+08	1.66E-02	3.85E+00	3.43E-01	2.66E+01
35	Heptane	3.42E+08	1.39E-02	3.24E+00	2.88E-01	2.69E+01
36	1,4-Diethyl-2-methylbenzene	3.41E+08	1.39E-02	3.23E+00	2.87E-01	2.72E+01
37	2,6,10-Trimethyltetradecane	3.37E+08	1.37E-02	3.19E+00	2.84E-01	2.75E+01
38	1-Ethyl-5-methylcyclopentene	3.33E+08	1.36E-02	3.15E+00	2.81E-01	2.78E+01
39	Methylcyclohexane	3.26E+08	1.33E-02	3.08E+00	2.74E-01	2.80E+01
40	(1-Methylidene) cyclobutane	3.23E+08	1.31E-02	3.05E+00	2.72E-01	2.83E+01
41	2-Methylheptane	3.21E+08	1.31E-02	3.04E+00	2.70E-01	2.86E+01
42	Octane	3.13E+08	1.27E-02	2.96E+00	2.64E-01	2.89E+01
43	1,2,3-Trimethylcyclopentene	2.84E+08	1.15E-02	2.68E+00	2.39E-01	2.91E+01
44	2,5-Dimethyl-heptane	2.80E+08	1.14E-02	2.65E+00	2.36E-01	2.93E+01
45	p-Xylene	2.64E+08	1.07E-02	2.50E+00	2.22E-01	2.95E+01
46	Hexane	2.58E+08	1.05E-02	2.44E+00	2.18E-01	2.98E+01
47	2-Chloro-2-methylpentane	2.57E+08	1.04E-02	2.43E+00	2.16E-01	3.00E+01
48	1-Chlorooctadecane	2.51E+08	1.02E-02	2.37E+00	2.11E-01	3.02E+01
49	Cis-1,3-Dimethylcyclohexane	1.99E+08	8.09E-03	1.88E+00	1.68E-01	3.04E+01
50	Heptylcyclohexane	1.95E+08	7.95E-03	1.85E+00	1.65E-01	3.05E+01
51	3-Methylhexane	1.64E+08	6.66E-03	1.55E+00	1.38E-01	3.07E+01
52	1-Heptadecyne	1.61E+08	6.53E-03	1.52E+00	1.35E-01	3.08E+01
53	Ethylcyclohexane	1.49E+08	6.05E-03	1.41E+00	1.25E-01	3.09E+01
54	Methylcyclopentane	1.17E+08	4.77E-03	1.11E+00	9.87E-02	3.10E+01
55	3-Methylcyclopentene	1.06E+08	4.32E-03	1.01E+00	8.95E-02	3.11E+01
56	2-Methylpentane	7.73E+07	3.14E-03	7.31E-01	6.51E-02	3.12E+01
57	2,6,10-Trimethyldodecane	5.72E+07	2.33E-03	5.41E-01	4.82E-02	3.12E+01
58	3-Methylpentane	2.87E+07	1.17E-03	2.71E-01	2.41E-02	3.13E+01
59	Pentane	1.68E+07	6.83E-04	1.59E-01	1.41E-02	3.13E+01
60	2-Methylbutane	2.91E+06	1.18E-04	2.75E-02	2.45E-03	3.13E+01
61	Unidentified compounds	8.16E+10	3.32E+00	7.72E+02	6.87E+01	1.00E+02

Σ PID VOCs signal (ppm)	Σ VOC mass (mg)	Total vol. (m ³)	Σ VOCs conc.(mg/m ³)
17140	4.83E+00	4.30E-03	1.12E+03

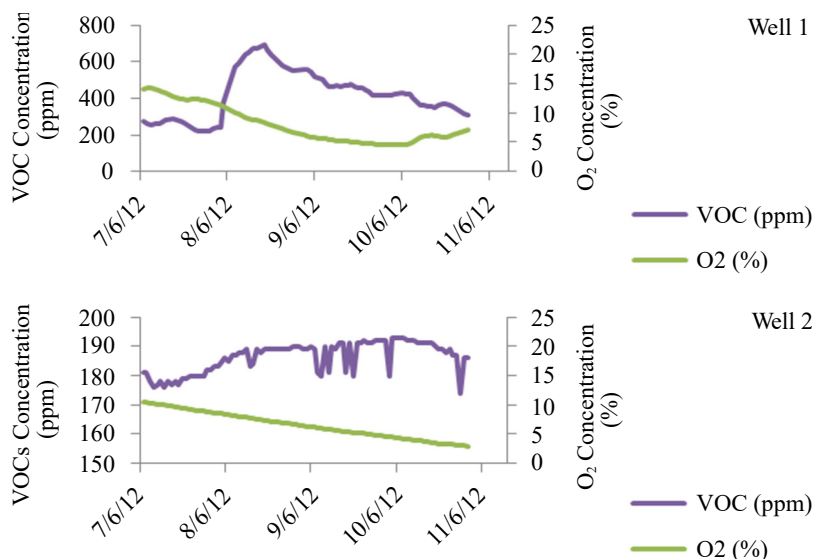


Fig. 2. Time series data from boreholes 1 and 2; showing variability in VOCs and O₂ Concentrations. The monitoring period is for five (5) days (7:6:201 – 11:6:2012).

pressure, borehole pressure, pressure differential, temperature and water level. It is made from stainless steel and is also intrinsically safe. It is environmentally sealed and has ingress protection rated IP-68. Gasclam is battery operated and can be powered for up to three months whilst operating on an hourly sampling frequency. Target applications for the Gasclam ground gas monitor include landfill for long term profiling, brownfield sites for development issues, monitoring for coal mine fires, leakage of crude/petroleum, solvent storage and filling stations, oil refineries for local compliance/regulation, and for below ground carbon capture and storage monitoring regime⁴.

Gasclam has the following technical information: (i) it has a memory which can record and store 65,000 time/date stamped readings, (ii) it weighs 7kg (13.2 lbs), (iii) It has overall length of 85cm (33.5 inches), (iv) the head diameter is 10.8 cm (4.25 inches), (v) its operation temperature range is -5 to +50 °C or 41°F to 122°F, (vi) it is powered by Duracell 1.5v LR20 MN1300 cells or a rechargeable battery pack (Nwachukwu, 2015a, b, c; Nwachukwu and Ugwuanyi, 2012).

1. Monitored Site Information

This is a Maine marine terminal with less than 200,000 barrels of storage capacity and situated at 601 Danforth Street Portland, ME 04102 along the eastern coast of the United States. It is also known as Merrill's Marine Terminal after the owner Paul D. Merrill. It is in an industrial section of the town with other industrial companies bordering its property. This property has been used as a marine terminal for over 36 years.

No active remedial systems are active or planned and there has not been any significant spills reported at this site in the past ten years.

II. MATERIALS AND METHODS

Two Gasclam units, equipped with PID sensors were each modified by integrating a sorption tube containing Tenax TA (poly-2, 6-diphenyl-p-phenylene oxide) adsorbent (see Figure 1) (Nwachukwu, 2015a, b, c). This particular sorbent was chosen based on its outstanding selective properties in adsorption and desorption of VOCs over others gases (Kroupa et al., 2004). Some of such properties include high thermal stability (Brown, 1996), high hydrophobicity and rapid desorption kinetics (Rothweiler and Wager, 1991; Saba et al., 2001; Barro et al., 2005; Lee et al., 2006; Singer et al., 2007; Schripp et al., 2007; Barro et al., 2009), high breakthrough volume (Camel and Caude, 1995; Baya and Siskos, 1996; Borusiewicz and Zięba-Palus, 2007; Ras and Borrull, 2009; Gallego et al., 2010), inertness towards most pollutants, high mechanical strength, and a good adsorption range of VOCs (Woolfenden, 2010). It has a surface area of 35m²g⁻¹ and a pore volume of 2.4 cm³g⁻¹ (Kroupa et al., 2004). VOCs adsorbed on Tenax TA sorbent tube were analysed by thermal desorption/gas chromatography-mass spectroscopy (TD/GC-MS); a method which has already been standardised internationally (ISO 16000-6, 2004).

1. In-situ VOC sample collection

⁴(www.ionscience.com/products/gasclam)

The modified Gasclam units were installed to monitor VOC concentrations continuously on an hourly sampling basis for up to five days from 7/6/2012 to 11/6/2012. The in-situ continuous data from the PID (figure 1) were downloaded while the sorbent tubes were detached from the Gasclam and sealed. The sorbent tubes were subsequently analysed ex-situ for specific VOCs by Thermal Desorption/Gas Chromatography-Mass Spectrometry (TD/GC-MS).

2. Ex-situ VOC sample analysis

Analyses of the samples were conducted by heating the sorbent tubes to 300°C. The volatile components were then trapped on a cold trap, held at -10°C, prior to desorption onto the GC column. Desorption of the TD tubes was carried out using a Markes International 50:50 TD system coupled to an Agilent GC/MS. Data acquisition in scanning mode was via a PC running Agilent Chemstation software.

The mass of each of the identified VOCs was calculated relative to the standard by assuming that the area of their peaks on the chromatogram is proportional to their masses. The relationship is shown below:

$$A_{is}/Q_{is} = A_x/Q_x \quad (1).$$

Where A_{is} is the area of the internal standard on the chromatogram, Q_{is} is the amount of internal standard = 500ng, A_x is the area of specific VOC on the chromatogram and Q_x is the unknown amount of specific VOCs. The VOCs analytical results are shown in Tables 1 and 2 respectively.

III. RESULTS AND DISCUSSION

Figure 2 represents the time series datasets obtained from two boreholes in the investigated site. The datasets show significant variability in VOCs concentration. The range of VOCs concentration in borehole 1 is 220 ppm to 692 ppm with an average concentration of 327 ppm whilst in borehole 2; it ranges from 174 ppm to 193 ppm with an average concentration of 179 ppm. As observed, the concentration of VOCs in borehole 1 is much higher than that in borehole 2, both in range and average concentration. An inverse relationship appeared to exist between VOCs concentration and atmospheric oxygen in borehole 1, but such relationship is not clearly portrayed in borehole 2. The inverse relationship suggests atmospheric pressure to be a control on the variability of VOC concentration in borehole 1.

Whilst bulk VOC concentration automatically depicts that a particular site constitutes risk; it does not define the level of risk until the bulk VOC concentration is resolved into its specific components. This implies also that a site may contain lower bulk VOC concentrations than another but at the same time be more hazardous. Due to this, the bulk VOC concentrations of 31385 ppm and 17140 ppm from boreholes 1 and 2 respectively were characterised into their specific components as shown in Tables 1 and 2.

The specific volatile organic compounds identified and quantified from the sorbent samples collected from this site are as shown in Tables 1 and 2 below. The Tables display 56 and 61 compounds for boreholes I and II respectively, and their quantity including the unidentified ones.

The total concentration of adsorbed VOCs in Borehole I is 4.17×10^2 mg/m³ whilst in Borehole II, it is 1.12×10^3 . Undecane and 2-Butyl-1, 1, 3-trimethylcyclohexane have the highest and lowest concentrations of 19.60 mg/m³ (4.71%) and 0.173 mg/m³ (0.042%) respectively among the identified VOCs in Borehole I. In Borehole II; 1, 3, 5-Trimethylbenzene and 2-Methylbutane have the highest and lowest concentrations of 20.05 mg/m³ (1.83%) and 0.028 mg/m³ (0.003%) respectively among the identified VOCs.

A good number of the identified VOCs in the site are included in the USEPA list of 107 compounds whose toxicity and volatility produce a potentially unacceptable inhalation risk to receptors – a property which makes the site a potentially dangerous one. The highest in occurrence among the VOCs are derivatives of benzene - a compound which has been recognized as human carcinogen (IARC, 2004). They were observed mostly in Borehole II (see Table II). This result was expected since the borehole is closest to the terminal unlike borehole I which is some distance away from it. This is typical of a site contaminated by gasoline (Choi et al., 2018) and similar to the findings of Nwachukwu and Dick (2016), Nwachukwu (2015a) and Nwachukwu (2015b). Although bulk VOC concentration does not immediately determine risk level; in the case of this site, borehole II which had higher bulk VOC concentration also has higher number of very dangerous specific VOCs. This observation, together with the relative closeness of borehole II to the terminal, points to the fact that the risk due to VOC emission at the site reduces away from the terminal. Indication is that people working within the terminal are more susceptible to VOC risk, and hence requires personal protective equipments.

Whilst identification of specific VOCs can be useful in defining the extent of risk constituted by a site or borehole in comparison to others, their quantification can be more useful especially when compared to set standards. An example is shown in Table 3 for some selected dangerous specific VOCs.

As shown in Table 3, Ethylbenzene displays a value of 4.87 mg/m³ in Borehole I, and this value is 4.02 mg/m³ higher than the set limit of 0.85 mg/m³. Indication is that Ethylbenzene exceeded the emission limit by several orders of magnitude in Borehole I – the only well it was detected in. Similarly, p-Xylene which was observed in the two wells had its emission limit exceeded by 0.69 mg/m³ and 2.0 mg/m³ in Boreholes I and II respectively during the monitoring period. The same thing applies to 1,2,3-Trimethylbenzene, 1,2,4-Trimethylbenzene, 1,3,5-Trimethylbenzene, 1,2,3,4-Tetramethyl benzene, and 1,2,3,5-Tetramethyl benzene, as these VOCs exceeded their emission limits with wide margin. On the other hand, only n-Hexane and Methylcyclohexane displayed values that were lower than their emission limits among the selected com-

pounds in the two Boreholes (Table 3).

IV. CONCLUSIONS

- This site is a potentially unsafe one especially to the operators and customers of the Marine terminal. This is because; most of the identified VOCs are included in the USEPA list of VOCs recognised to constitute risks both to human health and the environment.
- Moreover, a comparison of the individual concentrations of VOCs in this site with the EU-wide harmonized standard shows most of them have passed the set limits. The site is therefore recommended for remediation specifically to save the operators and people living close to it from potential VOC (especially benzene) hazards.
- The use of a PID/Tenax enabled Gasclam allows robust sub-surface VOC gas/vapour data collection, enabling site zoning and a more effective targeting of remedial efforts on those zones of actual concern leading to savings in both time and money and helping to ensure that the remedial works are more sustainable in line with current guidance.
- They also save frequent “snapshot” monitoring visits enabling a more accurate representation of sub-surface conditions to be obtained.

RECOMMENDATION

The data represented in this work were collected over a period of five days. Whilst the data are enough to identify specific VOCs in the studied site, more data need to be collected over time to determine how the concentrations of VOC will change in future.

ACKNOWLEDGMENT

The work was funded by Ebonyi State Government of Nigeria under the leadership of His Excellency; Chief Martin N. Elechi with grant number EBSG/SSB/FSA/040/VOL. VIII/046. Our appreciation also goes to the Special Assistant to the Governor of Ebonyi State on Higher Education, Professor Mike Otuma, who was exceptionally supportive. Last, but certainly not the least, include Dr Steve Boulton and Dr Bart van Dongen (Supervisors) and, indeed, management and staff of Manchester University, UK, who provided the desired supervision and environment for the smooth conduct of the research.

REFERENCES

- Agency for Toxic Substances Disease Registry (ATSDR) (2001). Landfill gas primer. An overview for environmental health professionals [available online] Accessed 7th May, 2009.
- Allen, W. H. (2002). Geoenvironmental protocol for site and waste characterization of former manufactured gas plants; worldwide remediation challenge in semi-volatile organic wastes. *Engineering Geology* 64(4), 317–338.
- Argyropoulos, C. D., G. M. Sideris, M. N. Christolis, Z. Nivolianitou and N. C. Markatos (2010). Modelling pollutants dispersion and plume rise from large hydrocarbon tank fires in neutrally stratified atmosphere. *Atmospheric Environment* 44, 803-813.
- Barro, R., S. Ares, C. Garcia-Jares, M. Llompart and R. Cela (2005). Sampling and analysis of polychlorinated biphenyls in indoor air by sorbent enrichment followed by headspace solid-phase microextraction and gas chromatography-tandem mass spectrometry. *Journal of Chromatography A* 1072(1), 99-106.
- Barro, R., Regueiro, J., M. Llompart and C. Garcia-Jares(2009). Analysis of industrial contaminants in indoor air. Part 2. Emergent contaminants and pesticides. *Journal of Chromatography A* 1216(3), 567-597.
- Baya, M. P. and P. A. Siskos (1996). Evaluation of Anasorb CMS and comparison with Tenax TA for the sampling of volatile organic compounds in indoor and outdoor air by breakthrough measurements. *Analyst* 121(3), 303-307.
- Borusiewicz, R. and J. Zięba-Palus (2007). Comparison of the Effectiveness of Tenax TA® and Carbotrap 300® in Concentration of Flammable Liquids Compounds. *Journal of Forensic Sciences* 52(1), 70-74.
- Brown, R. H. (1996). What is the best sorbent for pumped sampling-thermal desorption of volatile organic compounds? Experience with the EC sorbents project. *Analyst* 121(9), 1171-1175.
- BS ISO 16000-10 (2006). Indoor air. Determination of the emission of volatile organic compounds from building products and furnishing. Emission test cell method.
- BS ISO 16000-9 (2006). Indoor air. Determination of the emission of volatile organic compounds from building products and furnishing. Emission test chamber method.
- Camel, V. and M. Caude (1995). Trace enrichment methods for the determination of organic pollutants in ambient air. *Journal of Chromatography A* 710(1), 3-19.
- Cetin, E., M. Odabasi and R. Seyfioglu (2003). Ambient volatile organic compound (VOC) concentrations around a petrochemical complex and a petroleum refinery. *The Science of the Total Environment* 312, 103–112
- Choi, Y.Y., Lee, S.H., Park, J.-C., D.J. Choi and Y.S. Yoon (2019). The impact of corrosion on marine vapour recovery systems by VOC generated from ships. *International Journal of Naval Architecture and Ocean Engineering* 11(1), 52-58.
- Coward, S. K. D., V. M. Brown, D. R. Crump, G. J. Raw and J. W. Llewellyn (2002). Indoor air quality in homes in England: volatile organic compounds. BRE Report 446, CRC press, London.
- Coward, S.K.D., J.W. Llewellyn, G.J. Raw, V. M. Brown, D.R. Crump and D. I. Ross (2001). Indoor air quality in homes in England. BRE Report 433, CRC press, London.
- Department of the Environment (1995). Prioritisation and Categorisation Procedures for sites which may be contaminated. Contaminated Land Research Report No. 6.
- Dor, F., A. Person, D. Zmirou, P. Empereur-Bissonnet, V. Nedellec, J. M. Haguenoer, F., C. Ferguson Jongeneelen and W. Dab (2001). Personal exposure of workers to atmospheric PAHs on gasworks sites -The SOLEX study. *Applied Occupational and Environmental Hygiene* 16(6), 655-9.
- Environment Agency (2004). Guidance for monitoring trace components of landfill gas. Environment Agency Report LFTGN 04.
- Gallego, E., F.J. Roca, J. F. Perales and X. Guardino (2010). Comparative study of the adsorption performance of a multi-sorbent bed (Carbotrap, Carboxen 569) and a Tenax TA adsorbent tube for the analysis of volatile organic compounds (VOCs). *Talanta* 81(3), 916-924.
- Guidelines for the development of a VOC management plan (2009). Resolution MEPC185(59), IMO.
- Hers, I., R. Zapf-Gilje, L. Li and J. Atwater (2001). The use of indoor air measurements to evaluate intrusion of subsurface VOC vapours into buildings. *Journal of the Air & Waste Management Association* 51, 1318-1331.
- Howard, J. R. and A.H. Nikolas (2001). Measures to reduce emissions of

- VOCs during loading and unloading of ships in the EU. A report produced for the European Commission, Directorate General – Environment. AEAT/ENV/R/0469, Issue 2.
- Huang, W., Bai, J., S. Zhao and A. Lv. (2011). Investigation of oil vapor emission and its evaluation methods. *J. Loss Prev. Process. Ind.*, 24, 178-186.
- HSE (2000). Investigation of the Explosion at Linfield Street Dundee 22nd of October 2000. A report of the investigation by the Health and Safety Executive of the explosion and fire at 21 – 25 Linfield Street Dundee on the 22nd of October 2000.
- IARC (2004). International Agency for Research on Cancer (IARC), overall evaluation of carcinogenicity to humans. IARC monographs vol. 1-88.
- IPCC (2007). International Panel on Climate Change: The physical science basis, Fourth Assessment Report, Working Group I. Cambridge: Cambridge University; <http://www.ipcc.ch/ipccreports/ar4-wg1.htm>.
- International Convention for the Prevention of Pollution from Ships (2008). MARPOL ANNEX VI Regulation 15 Volatile Organic Compounds, IMO.
- ISO 16000-6 (2004). Indoor air-part 6. Determination of volatile organic compounds in indoor and test chamber air by active sampling on Tenax TA sorbent, thermal desorption and gas chromatography using MS/FID, International organisation for standardisation; Geneva, Switzerland, 1-28.
- Joint Research Centre (JRC) Project and European Collaborative Action (ECA) Report 29, (2013). Harmonisation framework for health based evaluation of indoor emissions from construction products in the European Union using the EU-LCI concept.
- Katy, B., Helen, H., Lara, P., B. Don and M. Cecilia (2009). The VOCs Handbook: Investigation, assessing, and managing risks from inhalation of VOCs at land affected by contamination. CIRIA Report 766.
- Kesselmeier, J., Kuhn, U., Wolf, A., Andreae, M.O., Ciccioli, P., Brancaleoni, E., Frattoni, M., Guenther, A., Greenberg, J., De Castro Vasconcellos, P., de Oliva, T., T. Tavares and P. Artaxo (2000). Atmospheric volatile organic compounds (VOC) at a remote tropical forest site in central Amazonia. *Atmospheric Environment* 34, 4063-4072.
- Khan, F. I. and A. Kr Ghoshal (2000). Removal of volatile organic compounds from polluted air. *J. Loss Prev. Process. Ind.* 13, 527-545.
- Kroupa, A., Dewulf, J., H. van Langenhov and I. Viden (2004). Breakthrough characteristics of volatile organic compounds in the -10 to +170 degrees C temperature range on Tenax TA determined by microtrap technology. *Journal of Chromatography A* 1038(1-2), 215-223.
- Lee, C.W., Y.T. Dai, C. H. Chien and D. J. Hsu (2006). Characteristics and health impacts of volatile organic compounds in photocopy centres. *Environmental Research* 100(2), 139-149.
- Lee, S., I. Choi and D. Chang (2013). Multi-objective optimization of VOC recovery and reuse in crude oil loading. *Appl. Energy* 108, 439-447.
- Lynge, E., Andersen, A., Nilsson, R., Barlow, L., Pukkala, E., Nordlinder, R., Boffetta, P., Grandjean, P., Heikkila, P., Horte, L.G., Jakobsson, R., Lundberg, I., Moen, B., T. Partanen and T. Riise (1997). Risk of cancer and exposure to gasoline vapors. *American Journal of Epidemiology* 145, 449-458.
- Maximilian, A. and K. Ryan (2009). Clearing the Air? The Effects of Gasoline Content Regulation on Air Quality. Centre for the Study of Energy Markets (CSEM) Working Paper Series, University of California Energy Institute, 2547 Channing Way Berkeley, California 94720-5180.
- Nwachukwu, A. N. and D. Anonye (2013). The effect of atmospheric pressure on methane (CH₄) and carbon dioxide (CO₂) emission from a closed landfill in Manchester, United Kingdom. *Environmental Monitoring and Assessment* 185(7), 729 - 735.
- Nwachukwu, A. N. and J. U. Ugwuanyi (2012). How to improve prediction of risk from ground Volatile Organic Compounds (VOCs) using In-borehole gas monitoring. *ARPN Journal of Science and Technology* 2, Special Issue, ICESR 2012, 175-183.
- Nwachukwu, A. N. (2014). Improved ground-gas risk prediction using in-borehole gas monitoring. A thesis submitted for the award of Doctor of Philosophy (Earth, Atmospheric & Environmental Sciences), University of Manchester, Manchester, UK.
- Nwachukwu, A.N. (2015a). Volatile organic compounds characterization: A case study of a tank farm in the united states. *JSM Environmental Science and Ecology* 3(2), 1019.
- Nwachukwu, A.N. (2015b). Characterization of Volatile Organic Compounds (VOCs) @ an Industrial Lagoon Site in North-West England, UK. *International Journal of Current Research and Academic Review* 3(10), 164-177.
- Nwachukwu, A.N. (2015c). Identification and quantification of Volatile Organic Compounds (VOCs) from a drinking water-well in the United States. *Octal Journal of Environmental Research* 3(3), 235-243.
- Nwachukwu, A.N. and C.D. Henry (2016). Volatile Organic Compounds (VOCs) at a Gasoline Retail Site in the United States. *International Journal of Scientific Research* 5(10), 298-302.
- Ott, M. G., Townsend, J. C., W. A. Fishbeck and R. A. Langner (1978). Mortality among workers occupationally exposed to benzene. *Archives of Environmental Health* 33, 3-10.
- Pandya, G. H., Gavane, A. G., A. D. Bhanarkar and V. K. Kondawar (2006). Concentrations of volatile organic compounds (VOCs) at an oil refinery. *International Journal of Environmental Studies* 63(3), 337-351.
- Ramirez, N., A. Cuadras, E. Rovira, F. Borrull and M. R. Marce (2010). Comparative study of solvent extraction and thermal desorption methods for determining a wide range of volatile organic compounds in ambient air. *Talanta* 82(2), 719-727.
- Ras, M.R. and F. Borrull (2009). Sampling and preconcentration techniques for determination of volatile organic compounds in air samples. *TrAC Trends in Analytical Chemistry* 28(3), 347-361.
- Rothweiler, H. and P. A. Wager (1991). Comparison of Tenax TA and Carbotrap for sampling and analysis of volatile organic compounds in air. *Atmospheric Environment - Part B Urban Atmosphere* 25(2), 231-235.
- Rowe, B.L., Toccalino, P.L., Morgan, M.J., J.S. Zorgoski, and C.V. Price (2007). Occurrence and potential human-health relevance of volatile organic compounds in drinking water from domestic wells in the United States. *Environmental Health Perspective* 115, 1539-1546.
- Saba, A., Cuzzola, A., Raffaelli, A., S. Pucci and P. Salvadori (2001). Determination of benzene at trace levels in air by a novel method based on solid-phase microextraction gas chromatography/mass spectrometry. *Rapid Communication Mass Spectrometry* 15(24), 2404-2408.
- Schripp, T., Nachtwey, B., Toelke, J., Salthammer, T., Uhde, E., M. Wensing and M. Bahadir (2007). A microscale device for measuring emissions from materials for indoor use. *Analytical and Bioanalytical Chemistry* 387(5), 1907-1919.
- Sergio, M.C., Graciela, A., R.C.M. Monica and M.P.G. Katia (2012). The impact of BTEX emissions from gas stations into the atmosphere. *Atmospheric Pollution Research* 3, 163-169.
- Shonnard, D. R. and D. S. Hiew (2000). Comparative environmental assessments of VOC recovery and recycle design alternatives for a gaseous waste stream. *Environ. Sci. Technol.* 34, 5222-5228.
- Singer, B.C., A.T. Hodgson, T. Hotchi, K.Y. Ming, R.G. Sextro, E. E. Wood and N. J. Brown (2007). Sorption of organic gases in residential rooms. *Atmospheric Environment* 41(15), 3251-3265.
- Srivastava, A., Joseph, A.E., More A. and S. Patil (2005). Emissions of VOCs at urban petrol retail distribution centres in India (Delhi and Mumbai). *Environmental Monitoring and Assessment* 109, 227-242.
- Standards for vapour emission control systems, MSC/Circ.585, IMO.
- Steinmann, A. C. (2008). Fragranced consumer products and undisclosed ingredients. *Environmental Impact Assessment Review* 29, 32-38.
- Tamaddoni, M., Sotudeh-Gharebagh, R., Nario, S., M. Hajhosseinzadeh and N. Mostoufi (2014). Experimental study of the VOC emitted from crude oil tankers. *Process Saf. Environ. Prot.* 92, 929-937.
- Thomas, A. O. and J. N. Lester (1994). The reclamation of disused gasworks sites: new solutions to an old problem. *Science of The Total Environment* 152(3), 239-260.
- Tillman, F. D. and J. W. Weaver (2005). Review of recent research on vapour intrusion. U.S. Environmental Protection Agency – Office of Research and Development, Washington DC, 20460.

- Tiwari, V., Y. Hanai and S. Masunaga (2010). Ambient levels of volatile organic compounds in the vicinity of petrochemical industrial area of Yokohama, Japan. *Air Quality, Atmosphere and Health* 3, 65-75.
- Venn, A., M. Cooper, V. Brown, D. Crump, J. Britton and S. Lewis (2001). Common indoor air pollutants in the home and the risk and severity of wheezing illness in school children. Paper submitted to the Conference of the American Thoracic Society.
- West, O. R., Siegrist, R. L., T. J. Mitchell and R. A. Jenkins (1995). Measurement error and spatial variability effects on the characterisation of volatile organic in the subsurface. *Environmental Science and Technology* 29 (3), 647-656.
- Woolfenden, E. (2010). Sorbent-based sampling methods for volatile and semi-volatile organic compounds in air: Part 2. Sorbent selection and other aspects of optimizing air monitoring methods. *Journal of Chromatography A* 1217(16), 2685-2694.